



You have just purchased the YUTRAX 2" Trailer Ball Hitch Kit TX113. Just follow these simple directions for use and your ball hitch will give you many years of trouble-free pleasure. Save these instructions for future reference.

If for any reason you have a problem with your product, DO NOT return to the retailer, contact the YUTRAX customer service department at 800-345-6007 M-F from 8 a.m. to 5 p.m. for assistance.

ASSEMBLY INSTRUCTIONS:

Tools needed - two 18mm wrenches


1. Insert the tongue spacer (2) into the trailer tongue.
SEE FIGURE 1
2. Attach the hitch coupler (1) to the trailer tongue using two M12 x 75mm bolts (3), four washers (4), and two nuts (5).
SEE FIGURE 2
3. Tighten all hardware.

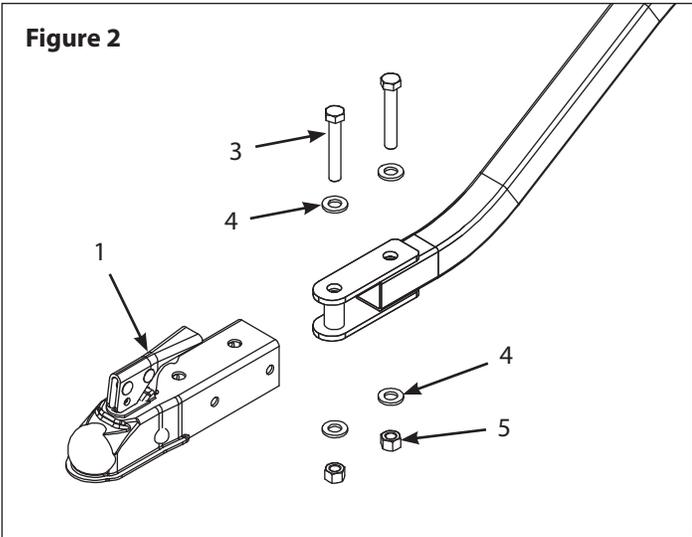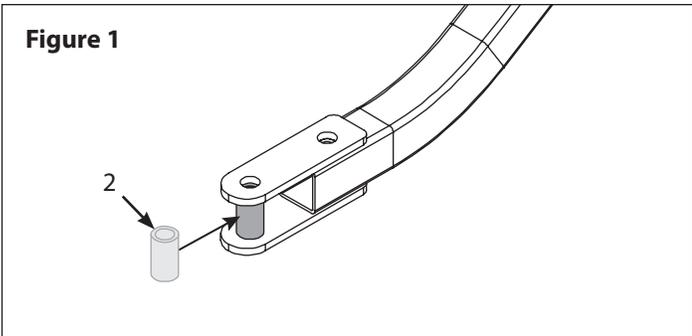

⚠ WARNING

READ AND UNDERSTAND ALL ASSEMBLY, INSPECTION, & USE INSTRUCTIONS PROVIDED BEFORE EACH USE. IF ANY INSTRUCTIONS ARE NOT UNDERSTOOD OR IF YOU HAVE A PARTS ISSUE CALL 800-345-6007 BEFORE USING. FAILURE TO FOLLOW INSTRUCTIONS COULD RESULT IN SERIOUS INJURY OR DEATH.

DOUBLE CHECK ASSEMBLY STEPS TO BE CERTAIN YOU HAVE CORRECTLY ASSEMBLED THIS PRODUCT.

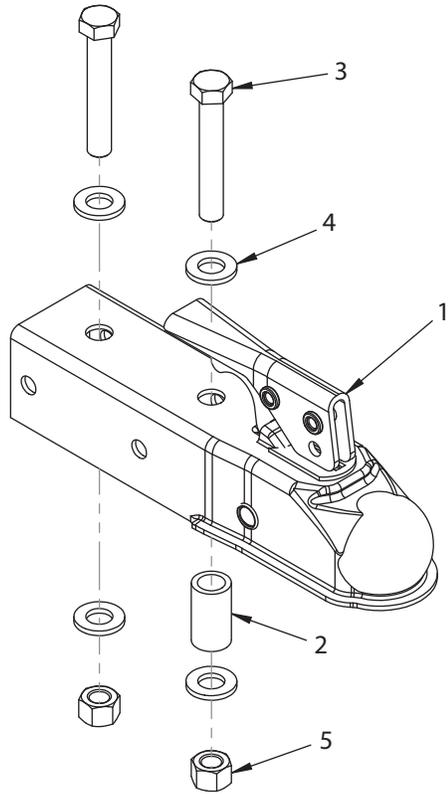

KEY #	PART #	DESCRIPTION	QTY.
1	TK133	2 INCH BALL HITCH COUPLER	1
2	25195	TONGUE SPACER	1
3	25194	M12 X 75 MM BOLT	2
4	21632	M12 WASHER	4
5	18274	M12 NUT	2